

INFORMATION UPDATE


** Please direct this publication to the department or individual responsible **

COINCO[®] BP4SX With NEXGEN \$5

Subject: INSTALLING A COINCO[®] BP4SX IN A CENTURY CHANGER

Products Affected: C2, C6, C8, C10, C6RL, C10RL

Coinco[®] BP4SX acceptors that have been built or upgraded to accept the new 2006 Series “NexGen” \$5 bills require different setup programming than for past Coinco[®] acceptors, **when installed in a Century Changer**. Models which can accept this new bill are marked as shown below - “Color \$5 2008” is printed in the Coupon Accept box. If you have one of these bill acceptors, program the Century Computer as shown below. (Programming instructions for the Coinco[®] unit are included with the bill acceptor.)

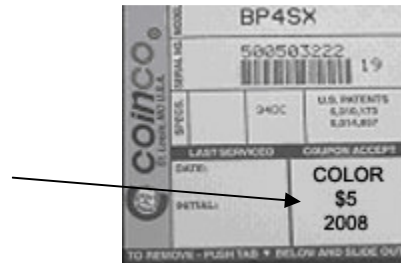

Coin Acceptor Settings -- **No Change**
Meter Settings -- **No Change**

Coin Level Settings -- **No Change**
Payout Settings -- **No Change**

ba 4 (for MDB) , then

b1 1 (**\$1 bill on**)
b2 1 (**original large portrait \$5 bill on**)
b3 1 (**NexGen \$5 bill on**)
b4 1 (**original large portrait \$10 bill on**)
b5 1 (**NexGen \$10 on**)
b6 0 **Must be set to 0**
b7 1 (**NexGen \$20 on**)

1b04 (4 quarters = \$1)
2b20 (20 quarters = \$5)
3b40 (20 quarters = \$5)
4b40 (40 quarters = \$10)
5b40 (40 quarters = \$10)
7b80 (80 quarters = \$20)

Important Note: The \$1 bill is the **only** small portrait bill that can be accepted.

